




# FLOOD LIGHT

Solar projector lamp series




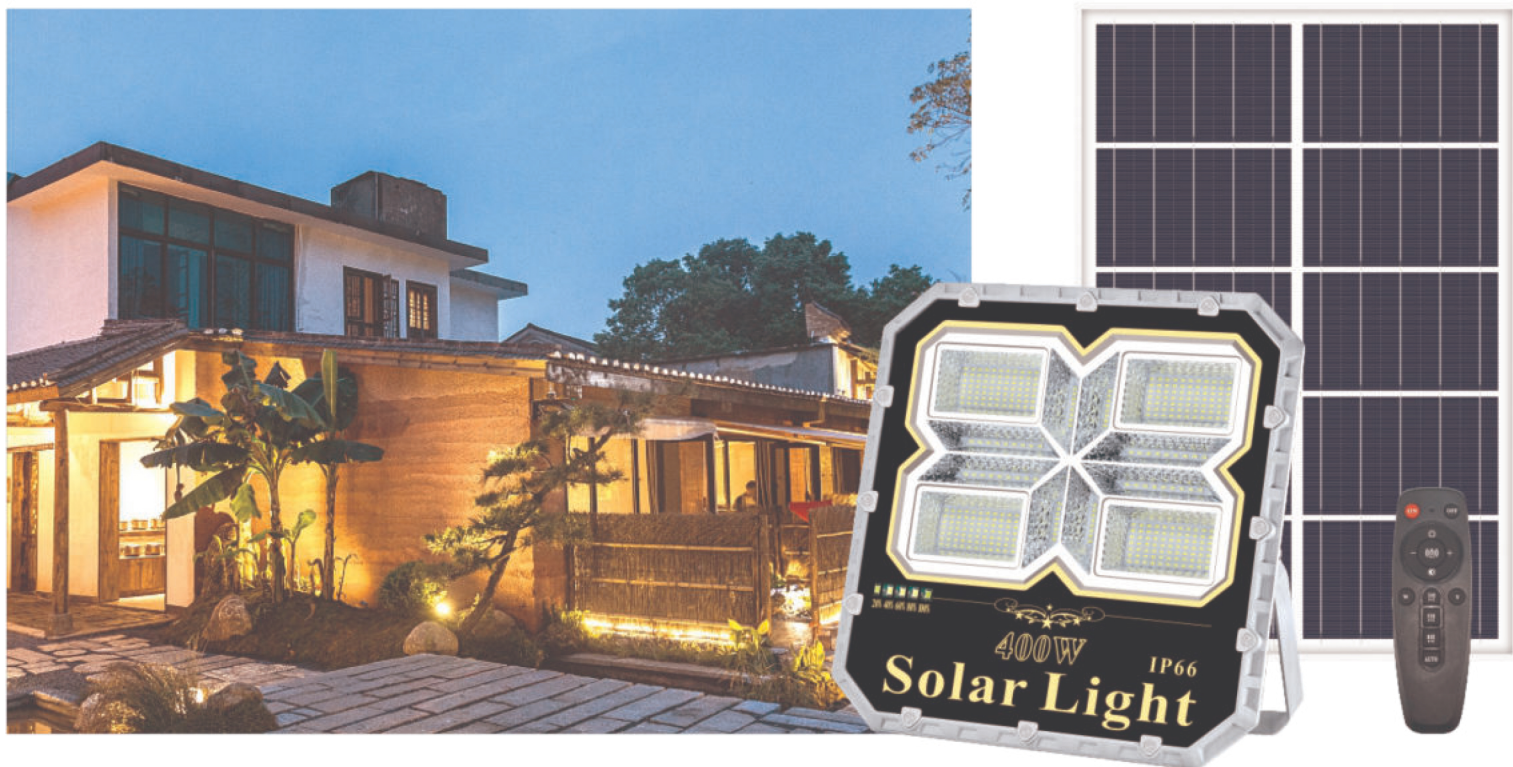

## 产品特点

### Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.

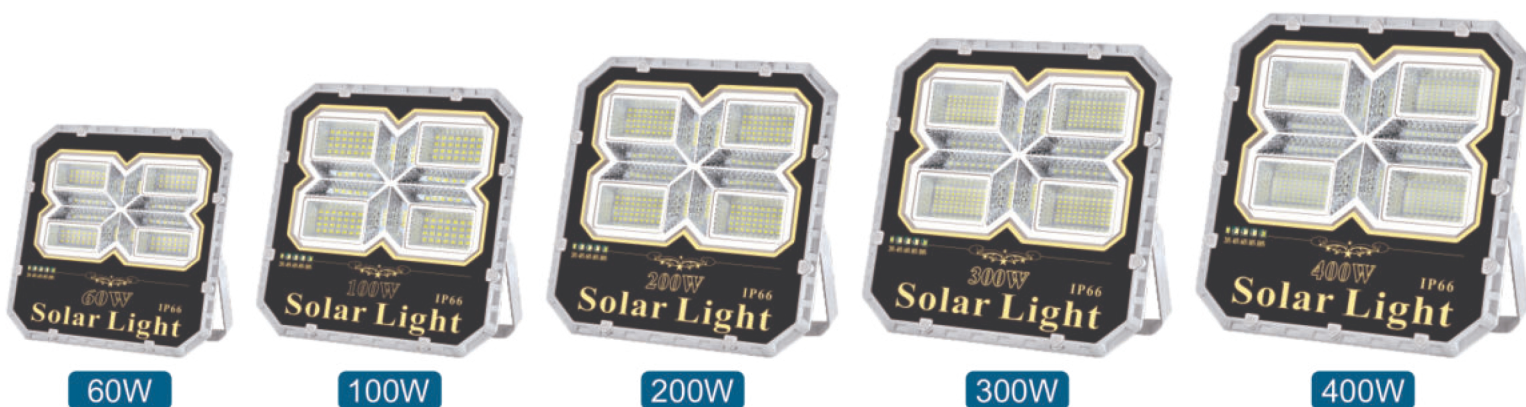

## 基本参数

### Product Parameters


Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-D60	60W	SMD/132PCS	3.2V10000mAh	多晶硅5V/18W	60m <sup>2</sup>	340x290x17mm	228x228x56mm
T-D100	100W	SMD/148PCS	3.2V15000mAh	多晶硅5V/25W	80m <sup>2</sup>	340x390x17mm	270x276x58mm
T-D200	200W	SMD/232PCS	3.2V20000mAh	多晶硅5V/35W	100m <sup>2</sup>	350x520x17mm	318x329x63mm
T-D300	300W	SMD/296PCS	3.2V25000mAh	多晶硅5V/40W	150m <sup>2</sup>	350x630x17mm	380x380x67mm
T-D400	400W	SMD/376PCS	3.2V30000mAh	多晶硅5V/50W	200m <sup>2</sup>	440x660x17mm	430x425x68mm



## 产品特点

### Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.

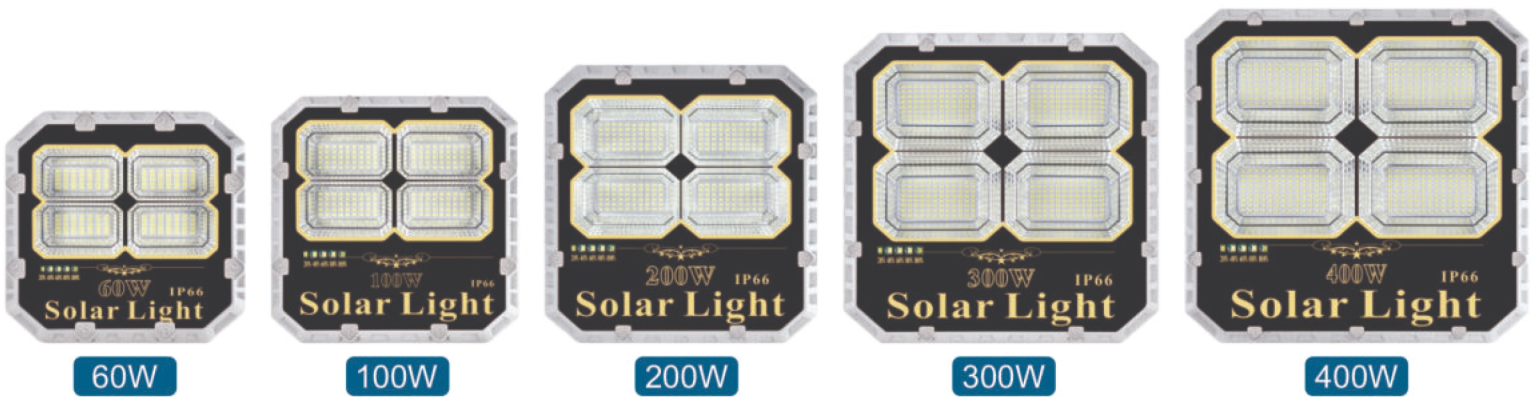

## 基本参数

### Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-R60/3	60W	SMD/140PCS	3.2V10000mAh	多晶硅5V/18W	60m <sup>2</sup>	340x290x17mm	228x228x56mm
T-R100/3	100W	SMD/180PCS	3.2V15000mAh	多晶硅5V/25W	80m <sup>2</sup>	340x390x17mm	270x276x58mm
T-R200/3	200W	SMD/240PCS	3.2V20000mAh	多晶硅5V/35W	100m <sup>2</sup>	350x520x17mm	318x329x63mm
T-R300/3	300W	SMD/384PCS	3.2V25000mAh	多晶硅5V/40W	150m <sup>2</sup>	350x630x17mm	380x380x67mm
T-R400/3	400W	SMD/468PCS	3.2V30000mAh	多晶硅5V/50W	200m <sup>2</sup>	440x660x17mm	430x425x68mm



## 产品特点

### Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.



## 基本参数

### Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-F60	60W	SMD/72PCS	3.2V10000mAh	多晶硅5V/18W	60m <sup>2</sup>	340x290x17mm	228x228x56mm
T-F100	100W	SMD/108PCS	3.2V15000mAh	多晶硅5V/25W	80m <sup>2</sup>	340x390x17mm	270x276x58mm
T-F200	200W	SMD/168PCS	3.2V20000mAh	多晶硅5V/35W	100m <sup>2</sup>	350x520x17mm	318x329x63mm
T-F300	300W	SMD/264PCS	3.2V25000mAh	多晶硅5V/40W	150m <sup>2</sup>	350x630x17mm	380x380x67mm
T-F400	400W	SMD/372PCS	3.2V30000mAh	多晶硅5V/50W	200m <sup>2</sup>	440x660x17mm	430x425x68mm



## 产品特点

### Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.



## 基本参数

### Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-A60	60W	SMD/112PCS	3.2V10000mAh	多晶硅5V/18W	60m <sup>2</sup>	340x290x17mm	228x228x56mm
T-A100	100W	SMD/160PCS	3.2V15000mAh	多晶硅5V/25W	80m <sup>2</sup>	340x390x17mm	270x276x58mm
T-A200	200W	SMD/180PCS	3.2V20000mAh	多晶硅5V/35W	100m <sup>2</sup>	350x520x17mm	318x329x63mm
T-A300	300W	SMD/324PCS	3.2V25000mAh	多晶硅5V/40W	150m <sup>2</sup>	350x630x17mm	380x380x67mm
T-A400	400W	SMD/360PCS	3.2V30000mAh	多晶硅5V/50W	200m <sup>2</sup>	440x660x17mm	430x425x68mm



## 产品特点 Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.



100W



200W



300W

## 基本参数 Product Parameters


Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-Y100	100W	SMD/144PCS	3.2V15000mAh	多晶硅5V/25W	100m	340x390x17mm	190x50x247mm
T-Y200	200W	SMD/180PCS	3.2V20000mAh	多晶硅5V/35W	150m	350x520x17mm	217x58x285mm
T-Y300	300W	SMD/324PCS	3.2V25000mAh	多晶硅5V/40W	200m	350x630x17mm	245x60x325mm



## 产品特点

### Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.

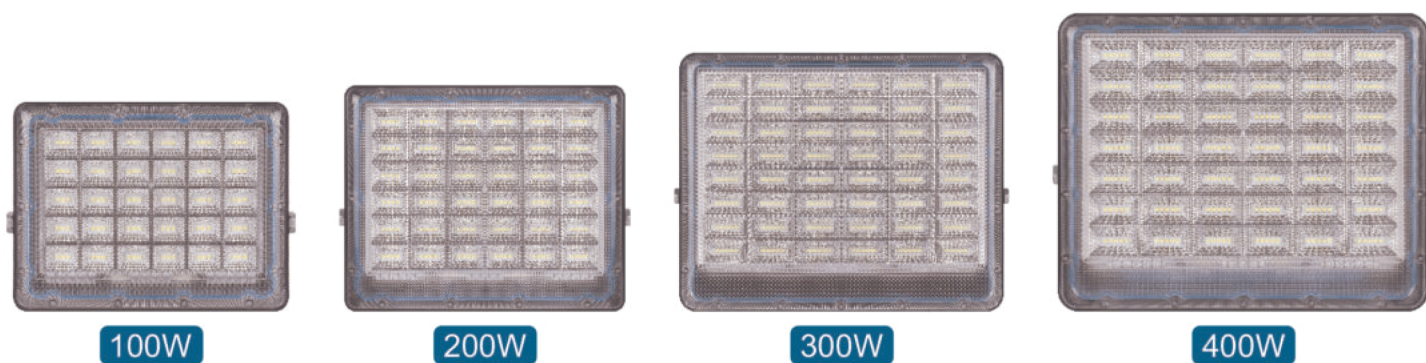

## 基本参数

### Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-H100	100W	SMD/90+14PCS	3.2V3000mAh	多晶硅5V/6W	40m <sup>2</sup>	185x308mm	190x145x45mm
T-H200	200W	SMD/144+14PCS	3.2V5000mAh	多晶硅5V/8W	60m <sup>2</sup>	237x356mm	225x180x45mm
T-H300	300W	SMD/210+16PCS	3.2V10000mAh	多晶硅5V/18W	80m <sup>2</sup>	340x290mm	263x210x45mm
T-H400	400W	SMD/288+16PCS	3.2V15000mAh	多晶硅5V/25W	100m <sup>2</sup>	340x390mm	290x233x45mm



## 产品特点 Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.



## 基本参数 Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-HD100	100W	SMD/120+14PCS	3.2V3000mAh	多晶硅5V/6W	40m <sup>2</sup>	185x308mm	190x145x45mm
T-HD200	200W	SMD/240+14PCS	3.2V5000mAh	多晶硅5V/8W	60m <sup>2</sup>	237x356mm	225x180x45mm
T-HD300	300W	SMD/300+16PCS	3.2V10000mAh	多晶硅5V/18W	80m <sup>2</sup>	340x290mm	263x210x45mm
T-HD400	400W	SMD/360+16PCS	3.2V15000mAh	多晶硅5V/25W	100m <sup>2</sup>	340x390mm	290x233x45mm





## 产品特点 Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.




## 基本参数 Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-B30/N	30W	COB/60X1	3.2V5000mAh	多晶硅5V/12W	40m	360x172x17mm	200x180x42mm
T-B60/N	60W	COB/60X2	3.2V10000mAh	多晶硅5V/18W	60m	340x290x17mm	228x196x45mm
T-B100/N	100W	COB/60X3	3.2V15000mAh	多晶硅5V/25W	80m	340x390x17mm	270x237x45mm
T-B200/N	200W	COB/120X2	3.2V20000mAh	多晶硅5V/35W	100m	350x520x17mm	318x288x50mm
T-B300/N	300W	COB/120X3	3.2V25000mAh	多晶硅5V/40W	150m	350x630x17mm	350x385x55mm



## 产品特点 Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.

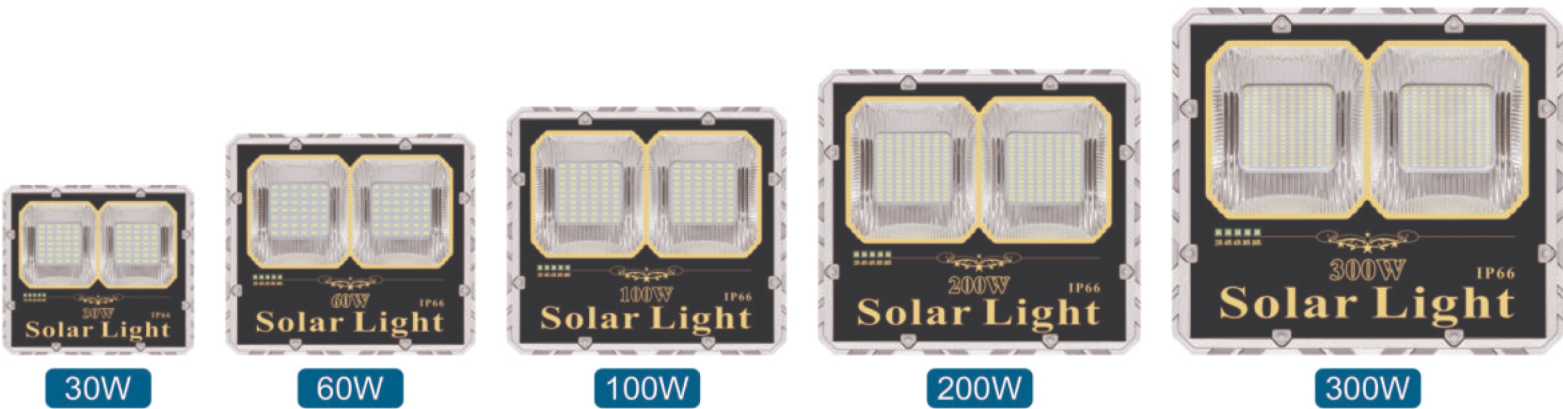

## 基本参数 Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-S30/N	30W	SMD/70PCS	3.2V5000mAh	多晶硅5V/12W	40m	360x172x17mm	200x180x42mm
T-S60/N	60W	SMD/84PCS	3.2V10000mAh	多晶硅5V/18W	60m	340x290x17mm	228x196x45mm
T-S100/N	100W	SMD/120PCS	3.2V15000mAh	多晶硅5V/25W	80m	340x390x17mm	270x237x45mm
T-S200/N	200W	SMD/240PCS	3.2V20000mAh	多晶硅5V/35W	100m	350x520x17mm	318x288x50mm
T-S300/N	300W	SMD/360PCS	3.2V25000mAh	多晶硅5V/40W	150m	350x630x17mm	350x385x55mm



## 产品特点

### Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.



## 基本参数


### Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-黑20	20W	SMD/42PCS	3.2V5000mAh	多晶硅5V/12W	40m	360x172x17mm	190x158x51mm
T-黑40	40W	SMD/63PCS	3.2V10000mAh	多晶硅5V/18W	60m	340x290x17mm	225x192x72mm
T-黑60	60W	SMD/99PCS	3.2V15000mAh	多晶硅5V/25W	80m	340x390x17mm	265x220x70mm
T-黑100	100W	SMD/180PCS	3.2V20000mAh	多晶硅5V/35W	100m	350x520x17mm	300x248x85mm




## 产品特点 Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.

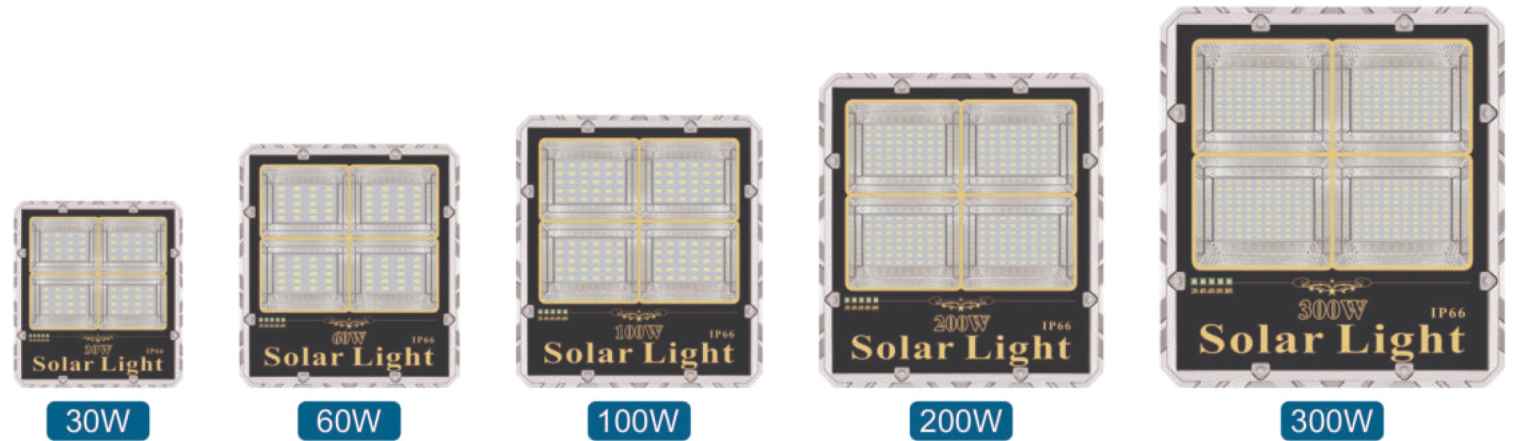

## 基本参数 Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-R30/N	30W	SMD/70PCS	3.2V5000mAh	多晶硅5V/12W	40m	360x172x17mm	200x180x42mm
T-R60/N	60W	SMD/80PCS	3.2V10000mAh	多晶硅5V/18W	60m	340x290x17mm	228x196x45mm
T-R100/N	100W	SMD/120PCS	3.2V15000mAh	多晶硅5V/25W	80m	340x390x17mm	270x237x45mm
T-R200/N	200W	SMD/224PCS	3.2V20000mAh	多晶硅5V/35W	100m	350x520x17mm	318x288x50mm
T-R300/N	300W	SMD/360PCS	3.2V25000mAh	多晶硅5V/40W	150m	350x630x17mm	350x385x55mm

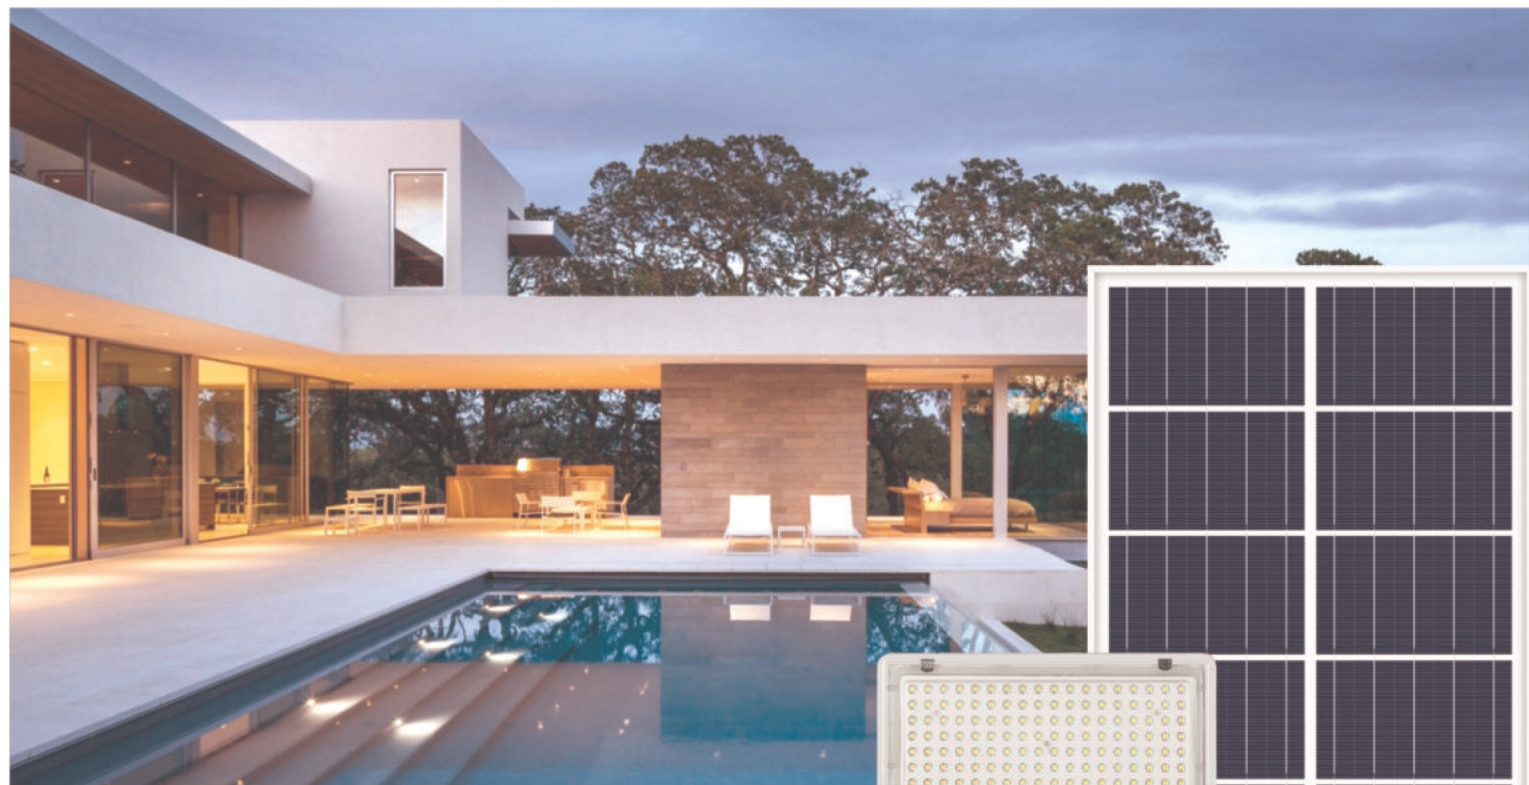

## 产品特点

### Product Features


1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.



100W



200W

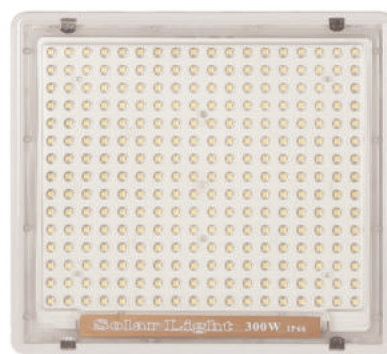


300W

## 基本参数

### Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-L100	100W	SMD/120PCS	3.2V15000mAh	多晶硅5V/25W	80m	340x390x17mm	188x168x42mm
T-L200	200W	SMD/240PCS	3.2V20000mAh	多晶硅5V/35W	100m	350x520x17mm	253x220x45mm
T-L300	300W	SMD/360PCS	3.2V25000mAh	多晶硅5V/40W	150m	350x630x17mm	300x270x50mm

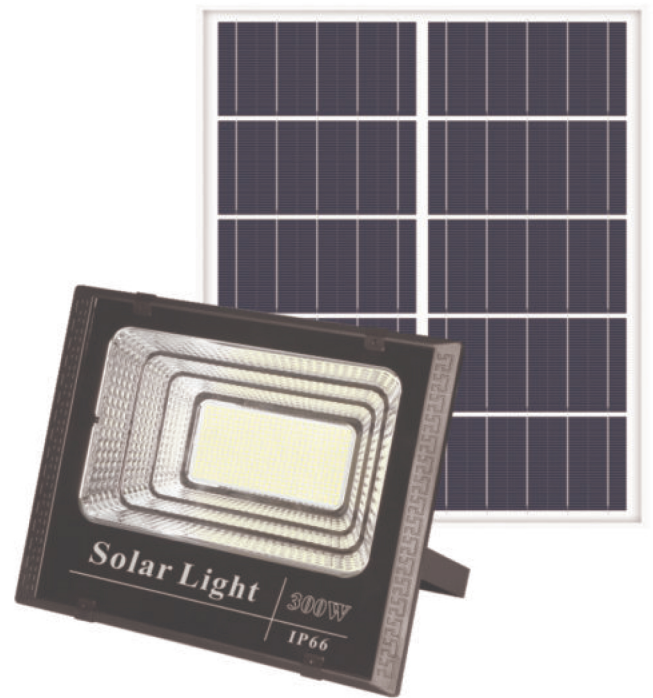

## 产品特点 Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.




## 基本参数 Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-P45	45W	SMD/120PCS	3.2V5000mAh	多晶硅5V/8W	40m	297x197x12mm	200x160mm
T-P80	80W	SMD/176PCS	3.2V10000mAh	多晶硅5V/12W	60m	355x235x12mm	250x200mm
T-P150	150W	SMD/260PCS	3.2V15000mAh	多晶硅5V/16W	80m	340x290x17mm	270x220mm
T-P300	300W	SMD/448PCS	3.2V20000mAh	多晶硅5V/25W	100m	340x390x17mm	320x260mm



## 产品特点 Product Features

1. High-density die-cast aluminum lamp body, corrosion-resistant.
2. Large-capacity lithium iron phosphate battery, large-scale five-grid polycrystalline photovoltaic panel, and national standard precision waterproof wire.
3. High brightness LED light source, high light efficiency: small light decay: no ultraviolet radiation, and the life span is as long as 50,000 hours.
4. Tempered glass mask, scientific light distribution, high light transmission, impact resistance, flame retardant, and strong thermal stability.
5. Function control: wireless remote control + intelligent light control + power display + fast charging without hindrance.
6. Waterproof grade IP66, physical structure waterproof + sealing strip. Applicable to villages, roads, gardens, villas, resorts, etc.

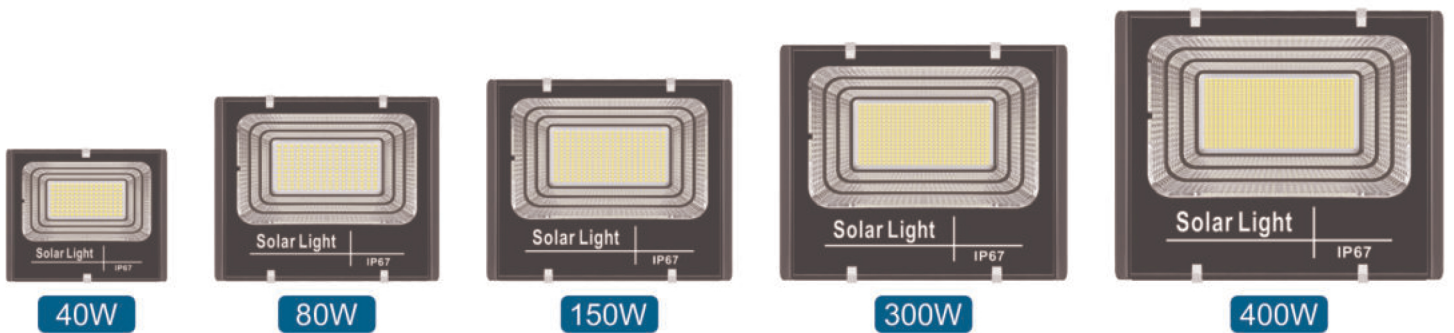

## 基本参数 Product Parameters

Model	Power	Lamp bead	Battery	Poly panel	lighting area	Lamp size	Panel size
T-C40	40W	SMD/114PCS	3.2V5000mAh	多晶硅5V/8W	40m	360x172x17mm	190x155x45mm
T-C80	80W	SMD/184PCS	3.2V10000mAh	多晶硅5V/12W	60m	340x290x17mm	230x195x50mm
T-C150	150W	SMD/258PCS	3.2V15000mAh	多晶硅5V/18W	80m	340x390x17mm	260x220x60mm
T-C300	300W	SMD/426PCS	3.2V20000mAh	多晶硅5V/25W	100m	350x520x17mm	315x265x70mm
T-C400	400W	SMD/674PCS	3.2V25000mAh	多晶硅5V/35W	150m	350x630x17mm	350x290x75mm

